

Features


- ⦿ High conversion efficiency
- ⦿ Low power tolerance of 0~+3%
- ⦿ Low degradation under light exposure
- ⦿ Can withstand high wind-pressure, snow load and extreme temperature
- ⦿ Passing IEC 61215 2400Pa mechanical load test

Quality & Safety

- ⦿ 10-year warranty on product materials and processing technology
- ⦿ Power output warranty:10 years:90%,25 years:80%
- ⦿ ISO 9001:2008(Quality Management System) certified factory
- ⦿ IEC61215,IEC61730 ,MCS CEC certified products
- ⦿ TUV,CE conformity

Application

- ⦿ On-grid residential roof-tops
- ⦿ On-grid commercial/industrial roof-tops
- ⦿ Solar power plants
- ⦿ Off-grid system
- ⦿ Other on-grid applications

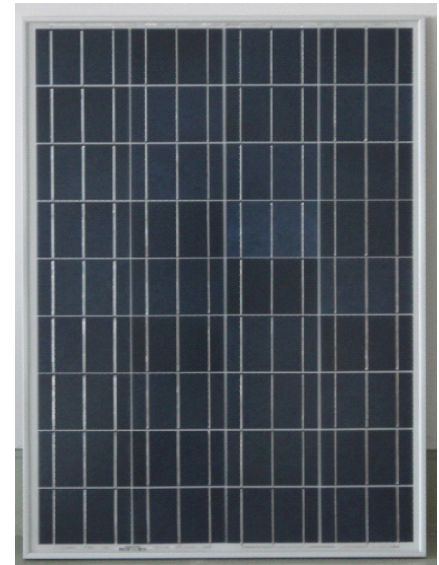

Specification

Model	Teletronik TPV-80PO -XXX Wp
Peak Power(Pmax)	80.00
Maximum Power Voltage(Vmp)	18.04
Maximum Power Current(Imp)	4.44
Open Circuit Voltage(Voc)	21.65
Short Circuit Current(Isc)	4.88
Cells Efficiency(%)	14.00
Module Efficiency(%)	11.70
Maximum System Voltage(V)	1000
Maximum Series Fuse Rating(A)	10
Power Tolerance	0~+3%
Pmax Temperature Coefficients(W/°C)	-0.470%
Voc Temperature Coefficients(V/°C)	-0.389%
Isc Temperature Coefficients(A/°C)	+0.057%
NOCT Nominal Operating Cell Temperature(°C)	47±2
Operating and Storage Temperature(°C)	-40~+85
Standard Test Condition(STC)	1.000W/m²;AM 1.5;25°C

Mechanical characteristics & Packaging

Cell Type	Poly-crystalline 156×104mm
No. of Cells	36(4×9)
Dimensions	678×1008×35mm
Weight	8.0kgs
Front Glass	3.2mm high transmission,low iron,tempered glass
Frame	Anodized Aluminium Alloy
Junction box	IP65 Rated
Output cables	2.5mm² Length 90mm, MC4 connector
Quantity/cartons	2pcs